




VGC24 200V P/N C49-A5

Voltage	Frequency	Current	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature	ErP 2013	ErP 2015
V	Hz	A	m³/h	RPM	dBA	↻	Min / Max		
24	50	2,77	-	975	65	R	-20°C / +70°C	NA	NA
24			573 CFM				-4°F / +158°F		



dBa : free let out

NA : Not Applicable

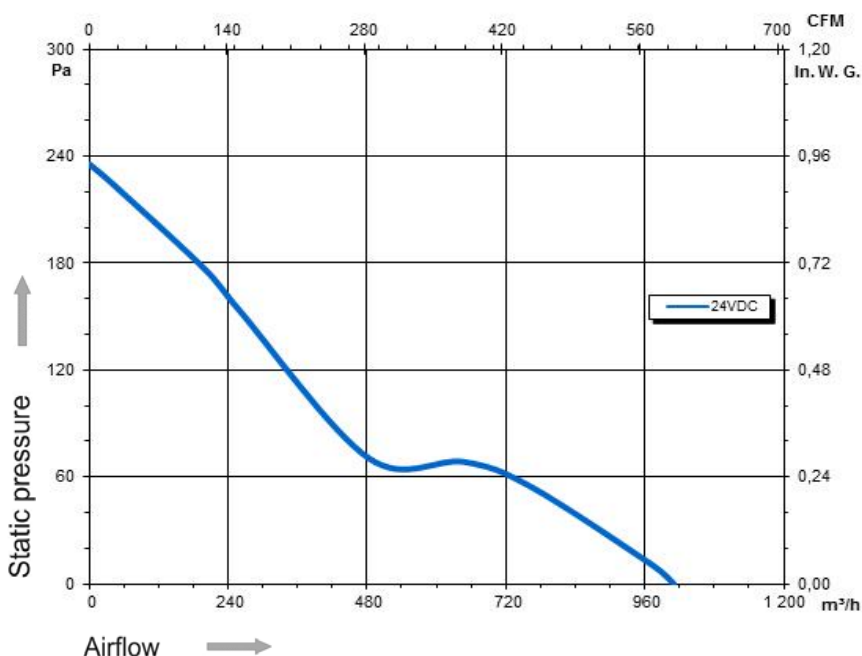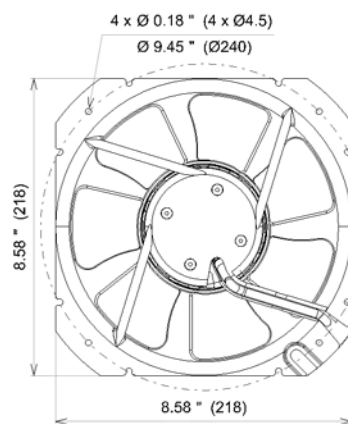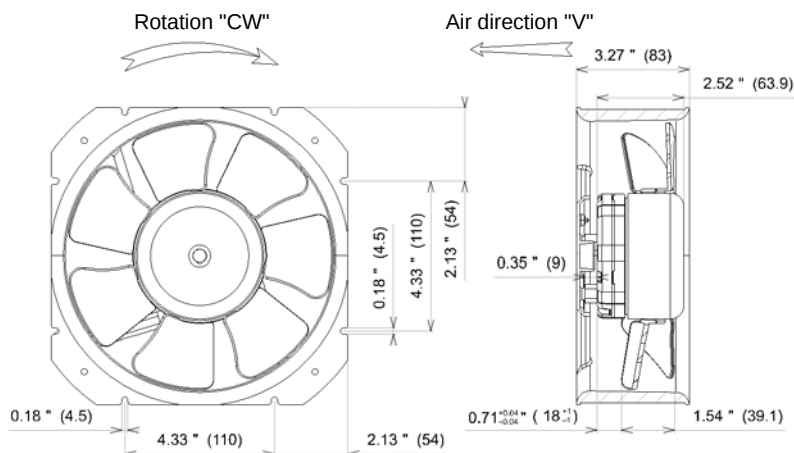

- Weight : 1,9 Kg

- Nominal voltage 24VDC (16-28VDC)
- Reverse polarity protection
- Soft start
- Locked rotor protection
- Tachometer output (open collector)
- Controlled by 0-10VDC or PWM signal
- IP44 protection depending on installation and position as per EN60034-5
- G6.3 balancing
- Rotor : black paint
- Plastic impeller PA 6/6
- Aluminium ring
- Connexion block fixed on ring
- Once the main power is switched on, 2 to 20 seconds are necessary for initialisation before fan rotation.



Finger guard

21360

