

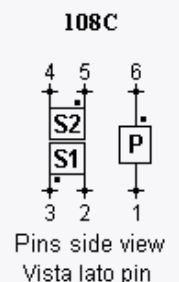
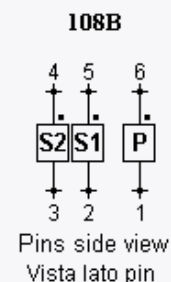
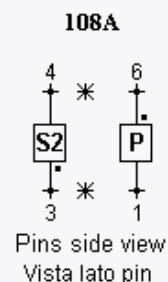



Pulse & Drive Transformers - Families 108, 110

Code	n	Vt [μVs]	I _{max} [mA]	t _r [μs]	R _c [Ω]	C _k [pF]	U _{is} [Vrms]	U _p [Vrms]	Drawing
TI 108001	1 : 1	500	100	3,0	100	10	500	4000	108A
TI 108002	2 : 1	200	100	0,8	100	8	500	4000	108A
TI 108010	1 : 1	250	250	1,5	40	7	500	3100	108A
TI 108020	1 : 1 : 1	250	250	1,5	40	7	500	3100	108C
TI 108021	1 : 1 : 1	200	250	1,4	40	5	500	3100	108B
TI 108022	1 : 1 : 1	250	250	1,8	40	7	500	3100	108B
TI 108030	2 : 1	350	250	3,5	40	8	500	3100	108A
TI 108040	2 : 1 : 1	350	250	3,5	40	8	500	3100	108B
TI 108050	3 : 1	300	250	2,5	40	8	500	3100	108A
TI 108060	3 : 1 : 1	300	250	2,5	40	8	500	3100	108C

Code	n	Vt [μVs]	I _{max} [mA]	t _r [μs]	R _c [Ω]	C _k [pF]	U _{is} [Vrms]	U _p [Vrms]	Drawing
TI 110143	1 : 1 : 1	800	25	1,0	400	10	500	4000	110D
TI 110144	3 : 1 : 1	800	25	1,0	400	10	500	4000	110D
TI 110145	1 : 1	800	25	1,0	400	10	500	4000	110E
TI 110153	1 : 1 : 1	600	100	1,2	100	8	500	4000	110D
TI 110154	3 : 1 : 1	600	100	1,2	100	7	500	4000	110D
TI 110155	1 : 1	500	100	1,0	100	7	500	4000	110E
TI 110233	1 : 1 : 1	300	40	1,2	40	7	500	4000	110D
TI 110234	3 : 1 : 1	300	40	1,0	40	7	500	4000	110D
TI 110235	1 : 1	300	40	1,0	40	6	500	4000	110E
TI 110239	1 : 1	350	40	2,0	40	5	500	1000	110F



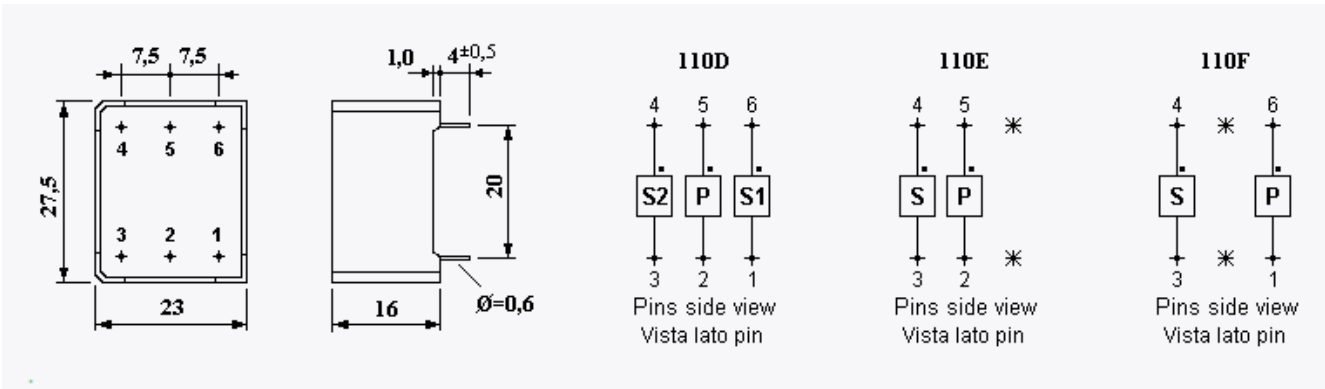

GD Rectifiers Ltd. Bentley House, 2 William Way, Burgess Hill, West Sussex RH15 9AG.

Tel: 01444 243452 Fax: 01444 870722

Email: enquiries@gdrectifiers.co.uk Website: www.gdrectifiers.co.uk