


4 OFF 5/16" UNF OR M8x25 CAP HD SCREWS +SPRING WASHERS. EQUI SPACED ON 65 PCD (46 SQ CTRS). FIX PLATE PRIOR TO POSITIONING CLAMP.

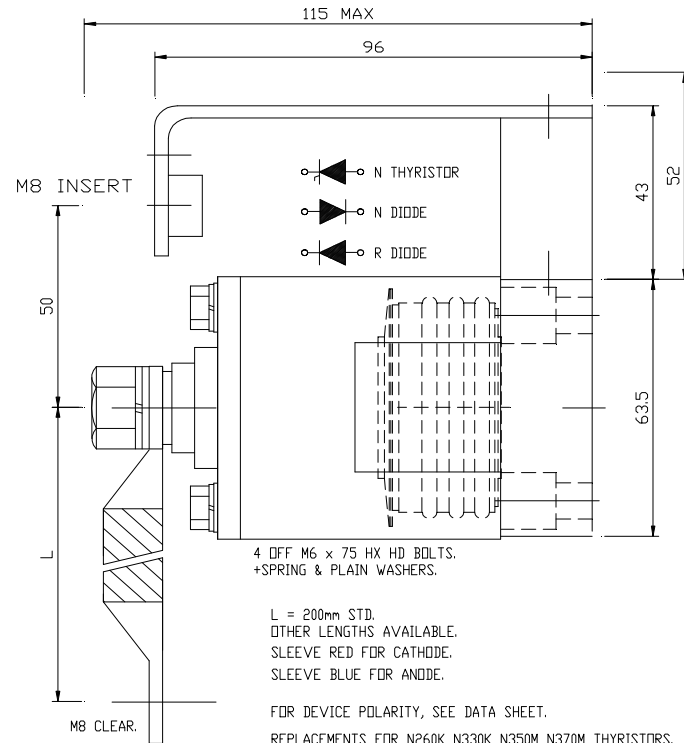

4 OFF M6 x 75 HX HD BOLTS. +SPRING & PLAIN WASHERS.

L = 200mm STD. OTHER LENGTHS AVAILABLE. SLEEVE RED FOR CATHODE. SLEEVE BLUE FOR ANODE.

FOR DEVICE POLARITY, SEE DATA SHEET.

REPLACEMENTS FOR N260K N330K N350M N370M THYRISTORS. REPLACEMENTS FOR KBR/KBN515 595 635 805 935 DIODES.

TOLERANCES UNLESS SPECIFIED UNLIMITED DIMENSIONS TO BE ± 0.2 ANGLES ± 0° 30' HOLES + 0.1 - 0.02

REMOVE SHARP EDGES ALL DIMENSIONS IN MILLIMETRES CHAMFER ALL THREADS AT 45 TO ROOT DIAMETER.

POWERSEM LTD OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND WHICH MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION IN WRITING FROM THE OWNERS. © POWERSEM LTD.

TITLE: Offset 61mm Sq Base Adaptor Kit+Busbar

JOB:

MAT'L:

SPEC.

FINISH:

SCALE: 1:1

DRAWN: PB

CHK'D: MP

MDD. No

ISSUE No

1.29/11/11

DRG.No.B 010161A

ASSEMBLY ON:  
ASSEMBLY ON

THIRD ANGLE PROJECTION