


When Hi/Lo trips fitted
Mount left & right respectively

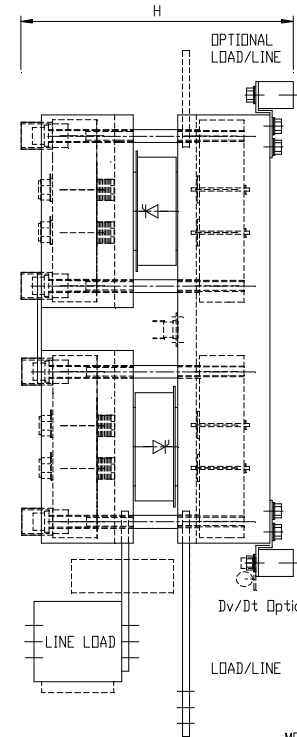

DIM 'H'	
26mm Device	220mm
33mm Device	230mm
38mm Device	234mm

MOUNTING 4*M8 PER PHASE
CONNECTION HOLES M8 CLEAR
G/K LEADS 600mm
FUSES, ACCT, TT, Dv/Dt OPTIONAL.

TOLERANCES UNLESS SPECIFIED
UNLIMITED DIMENSIONS TO BE ± 0.2
ANGLES ± 0° 30°
HOLES + 0.1 - 0.02

REMOVE SHARP EDGES
ALL DIMENSIONS IN MILLIMETRES
CHAMFER ALL THREADS AT 45 TO
ROOT DIAMETER.

POWERSEM LTD OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS
SUPPLIED IN CONFIDENCE AND WHICH MUST NOT BE USED FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION
IN WRITING FROM THE OWNERS. © POWERSEM LTD.

TITLE: W3C-DCRxx/x PS257/400/180B

JOB:

MAT'L:

SPEC:

FINISH:

SCALE 1:4

DRAWN PB

CHK'D MP

MOD. No

ISSUE No 2/08.09.96

DRG.No.B 020131

ASSEMBLY DN:
ASSEMBLY DN

THIRD ANGLE PROJECTION

