


FEATURES



- Aluminium fan casing and glass fibre reinforced plastic (PBT) impeller.
- Shaded-pole motor. Thermally protected against running overload.
- Electrical connection via 2 leads UL1007 22AWG, 250mm long.
No 2 M4 thread on the casing for earth connection.
- Rated temperature range:
Ball bearing from -40°C to +70°C
- Service life L10:
Ball bearing 40,000 hours at 40°C
20,000 hours at t max
- Weight 920g.

Please refer to our terms of sales including our warranty and limited liabilities clauses.

DRAWING

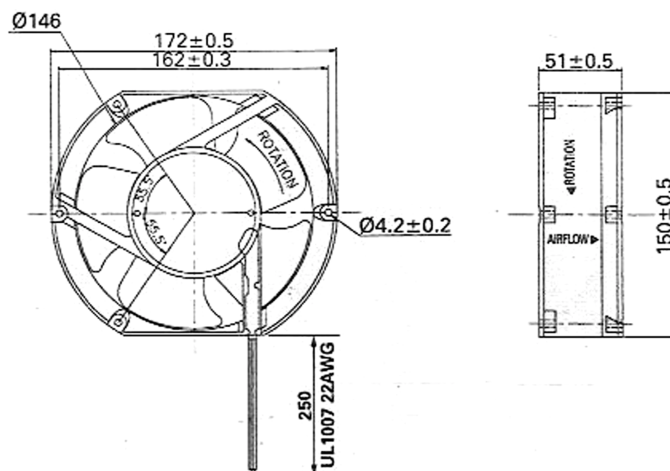

AIR FLOW CURVES

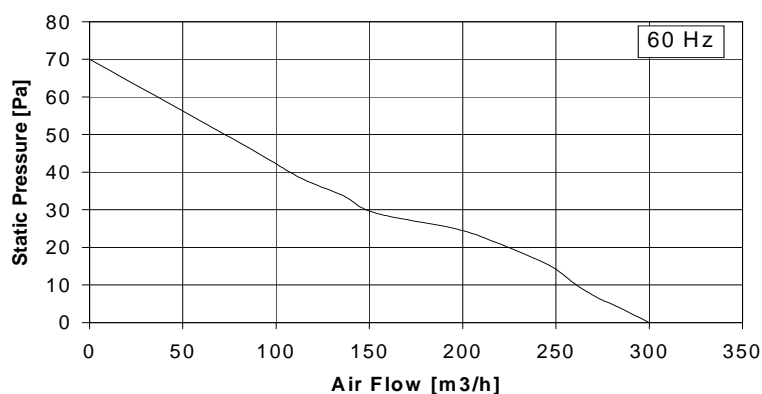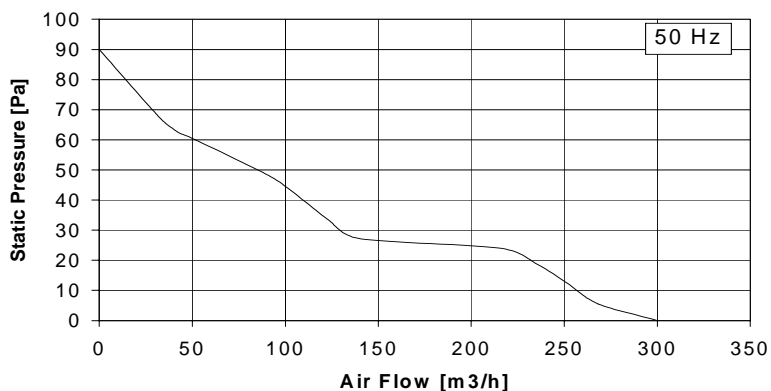

Model	Rated Voltage [V]	Frequency [Hz]	Input Power [W]	Speed [rpm]	Air Flow [m3/h]	Static Pressure [Pa]	Noise [dB(A)]	Approvals		
								UL	CUL	VDE
A17C12HWBP00	115	50/60	37/34	2500/2500	300/300	90/70	51/51			
A17C23HWBP00	230	50/60	37/34	2500/2500	300/300	90/70	51/51			