

SINGLE PHASE **HALF CONTROLLED BRIDGES** **WITH FREE WHEEL DIODE**


GD Rectifiers

QUALITY & SERVICE

OPTIONS

FITTED LINE FUSES, INDICATORS, MICRO SWITCHES.
Dv/Dt SUPPRESSION
MOV OVER VOLTAGE SUPPRESSION
Hi/Lo THERMAL TRIPS

WATER COOLED OPTIONS.
HIGHER VOLTAGES
IP20 ENCLOSED
STANDBY FANS
TRIGGER CIRCUITS.
CONSULT FACTORY.

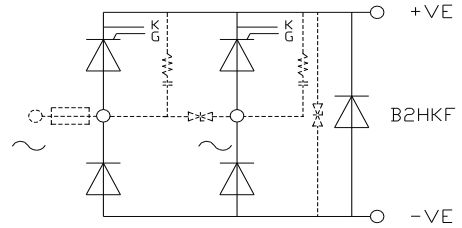

ISOLATED DEVICES

DWG No	Max Output Cont Amps @ 30C	Max Output Cont Amps @ 40C	Cooling Mode	DEVICE I2T A2S *1000 @TVJ	DEVICE VRRM MAX	Height mm	Width mm	Depth mm	Weight KG
B2HKF 020321	24	22	NAC	1.05	1600	150	96	80	1.1
B2HKF 020364	44	40	NAC	1.05	1600	120	125	180	3.1
B2HKF 020366	49	45	NAC	1.05	1600	180	125	180	3.5
B2HKF 020366	76	70	NAC	9.1	1800	180	125	180	3.5
B2HKF 020368	110	100	NAC	20	1800	300	125	180	6
B2HKF 020382	122	112	FAC	9.1	1800	230	125	180	4.3
B2HKF 020397	140	125	NAC	137	1800	300	125	180	6
B2HKF 020382	165	151	FAC	20	1800	230	125	180	4.3
B2HKF 020370	190**	170**	NAC	320	1800	300	125	180	7
B2HKF 020980B3	255**	235**	NAC	320	1800	400	338	140	13
B2HKF 020982B3	260**	240**	NAC	1050	1800	400	338	140	15
B2HKF 020060B3	270	248	FAC	137	1800	350	125	180	7.2
B2HKF 021010B3	290**	270**	NAC	320	1800	400	438	140	15
B2HKF 021015B3	310**	280**	NAC	1050	1800	400	438	140	19
B2HKF 020420B3	335**	314**	FAC	245	1600	350	135	180	8.2
B2HKF 021915	370**	335**	NAC	2800	1800	450	438	190	30
B2HKF 020420B3	390**	362**	FAC	320	1800	350	135	180	8.2
B2HKF 020425B3	480**	450**	FAC	320	1800	400	190	200	10
B2HKF 020971B3	565**	525**	FAC	320	1800	522	248	235	14
B2HKF 020984B3	630**	590**	FAC	320	1800	610	338	235	17
B2HKF 020961B3	780**	700**	FAC	1050	1800	522	248	235	16
B2HKF 020985B3	900**	800**	FAC	1050	1800	610	338	235	19

****Series Free Wheel Diode.**

