

THREE PHASE HALF CONTROLLED BRIDGES WITH FREE WHEEL DIODE.


GD Rectifiers

QUALITY & SERVICE

OPTIONS
 FITTED LINE FUSES, INDICATORS, MICRO SWITCHES.
 Dv/Dt SUPPRESSION
 MOV OVER VOLTAGE SUPPRESSION
 Hi/Lo THERMAL TRIPS

WATER COOLED OPTIONS.
 HIGHER VOLTAGES
 IP20 ENCLOSED
 STANDBY FANS

TRIGGER CIRCUITS.
 CONSULT FACTORY.

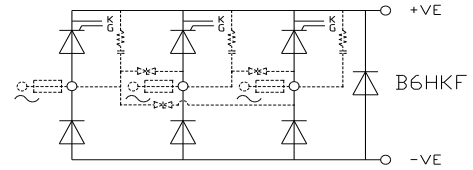

ISOLATED DEVICES

DWG No	Max Output Cont Amps @ 30C	Max Output Cont Amps @ 40C	Cooling Mode	DEVICE I2T A2S *1000 @TVJ	DEVICE VRRM MAX	Height mm	Width mm	Depth mm	Weight KG
B6HKF 020041	27	24	NAC	1.05	1600	150	96	80	1.2
B6HKF 020043	57	50	NAC	1.05	1600	180	125	180	3.7
B6HKF 020043	84	77	NAC	9.1	1800	180	125	180	3.7
B6HKF 020043	104	95	NAC	20	1800	180	125	180	3.7
B6HKF 020053	125	115	NAC	20	1800	300	125	180	5.9
B6HKF 020051	145	134	FAC	9.1	1800	230	125	180	4.5
B6HKF 020058	165	150	NAC	137	1800	300	125	180	6.5
B6HKF 020051	192	177	FAC	20	1800	230	125	180	4.5
B6HKF 020056	219	202	FAC	20	1800	350	125	180	6.8
B6HKF 020064B3	225**	205**	NAC	320	1800	300	125	180	8
B6HKF 020981	280**	260**	NAC	320	1800	400	338	140	13.5
B6HKF 020057	320	295	FAC	137	1800	350	125	180	7.5
B6HKF 021011	330**	300**	NAC	320	1800	400	438	140	17.5
B6HKF 021018	350**	320**	NAC	1050	1800	400	438	140	20.5
B6HKF 020065B3	405**	378**	FAC	245	1600	350	135	180	9
B6HKF 021925	410**	370**	NAC	2800	1800	450	450	190	39
B6HKF 020065B3	445**	414**	FAC	304	1800	350	135	180	9
B6HKF 020065B3	465**	435**	FAC	320	1800	350	135	180	9
B6HKF 020068	560**	520**	FAC	320	1800	400	190	200	10.5
B6HKF 020983	770**	720**	FAC	320	1800	610	338	235	17.5
B6HKF 020985B4	1095*/1150**	1050**	FAC	1050	1800	610	338	235	20.5
B6HKF 021960	1500**	1400**	FAC	2800	1800	700	450	225	43

** Series Free Wheel Diode

* Fuse limited.

