

22 x 58 mm gR cylindrical fuse links



Product description

Eaton's Bussmann® series 22 x 58 mm cylindrical class gR fuse links are used to protect AC/DC drives and semi conductors.

Standard features

- Compact design
- Available with or without striker
- Compatible with Eaton's Bussmann series CH modular fuse holders (data sheet number 10115)

Catalogue symbol

- FWP-(amp)G22F without indicator
- FWP-(amp)G22FI with indicator

Fuse link size

- 22 x 58 mm

Technical data

- Rated voltage: 690 V a.c./ 500 V d.c.
- Rated current: 20 to 100 A
- Breaking capacity: 200 kA a.c./50 kA d.c.
- Class of operation: gR

Standards/Approvals

- IEC 60269-4
- UL 248-13




Packaging

- MOQ: 10


Table 1. Technical Data

Catalogue number without striker	Catalogue number with striker	Rated current (A)	Rated voltage	Pre-arcing I ² t	Total I ² t at 690 V a.c.	Power loss at 80% I _n (W)	Power loss at I _n (W)
FWP-20G22F	FWP-20G22FI	20	690 V a.c./500 V d.c.	24	154	3.23	6.00
FWP-25G22F	FWP-25G22FI	25	690 V a.c./500 V d.c.	43	274	3.66	6.65
FWP-32G22F	FWP-32G22FI	32	690 V a.c./500 V d.c.	97	616	4.86	9.21
FWP-40G22F	FWP-40G22FI	40	690 V a.c./500 V d.c.	180	899	4.50	8.24
FWP-50G22F	FWP-50G22FI	50	690 V a.c./500 V d.c.	273	1362	6.26	11.85
FWP-63G22F	FWP-63G22FI	63	690 V a.c./500 V d.c.	516	2575	7.35	13.80
FWP-80G22F	FWP-80G22FI	80	690 V a.c./500 V d.c.	1092	5448	8.40	14.00
FWP-100G22F	FWP-100G22FI	100	690 V a.c./500 V d.c.	2065	10,300	9.40	17.70

Correction curves

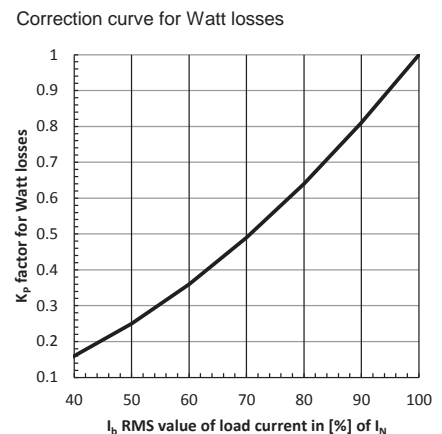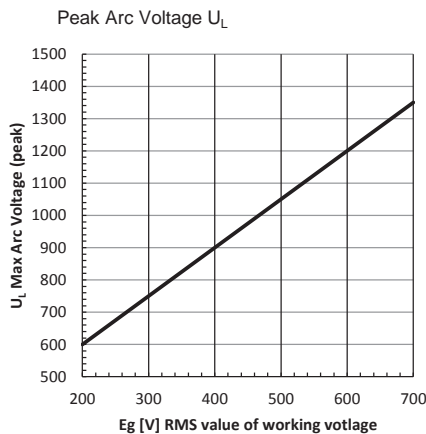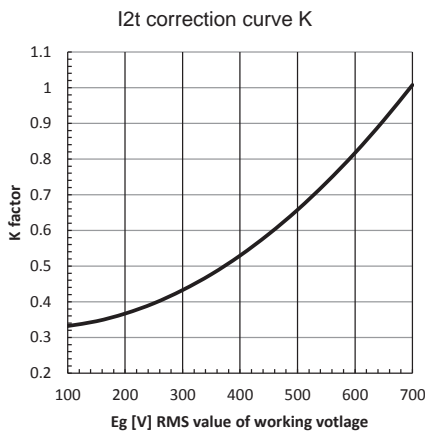


Time-current curve

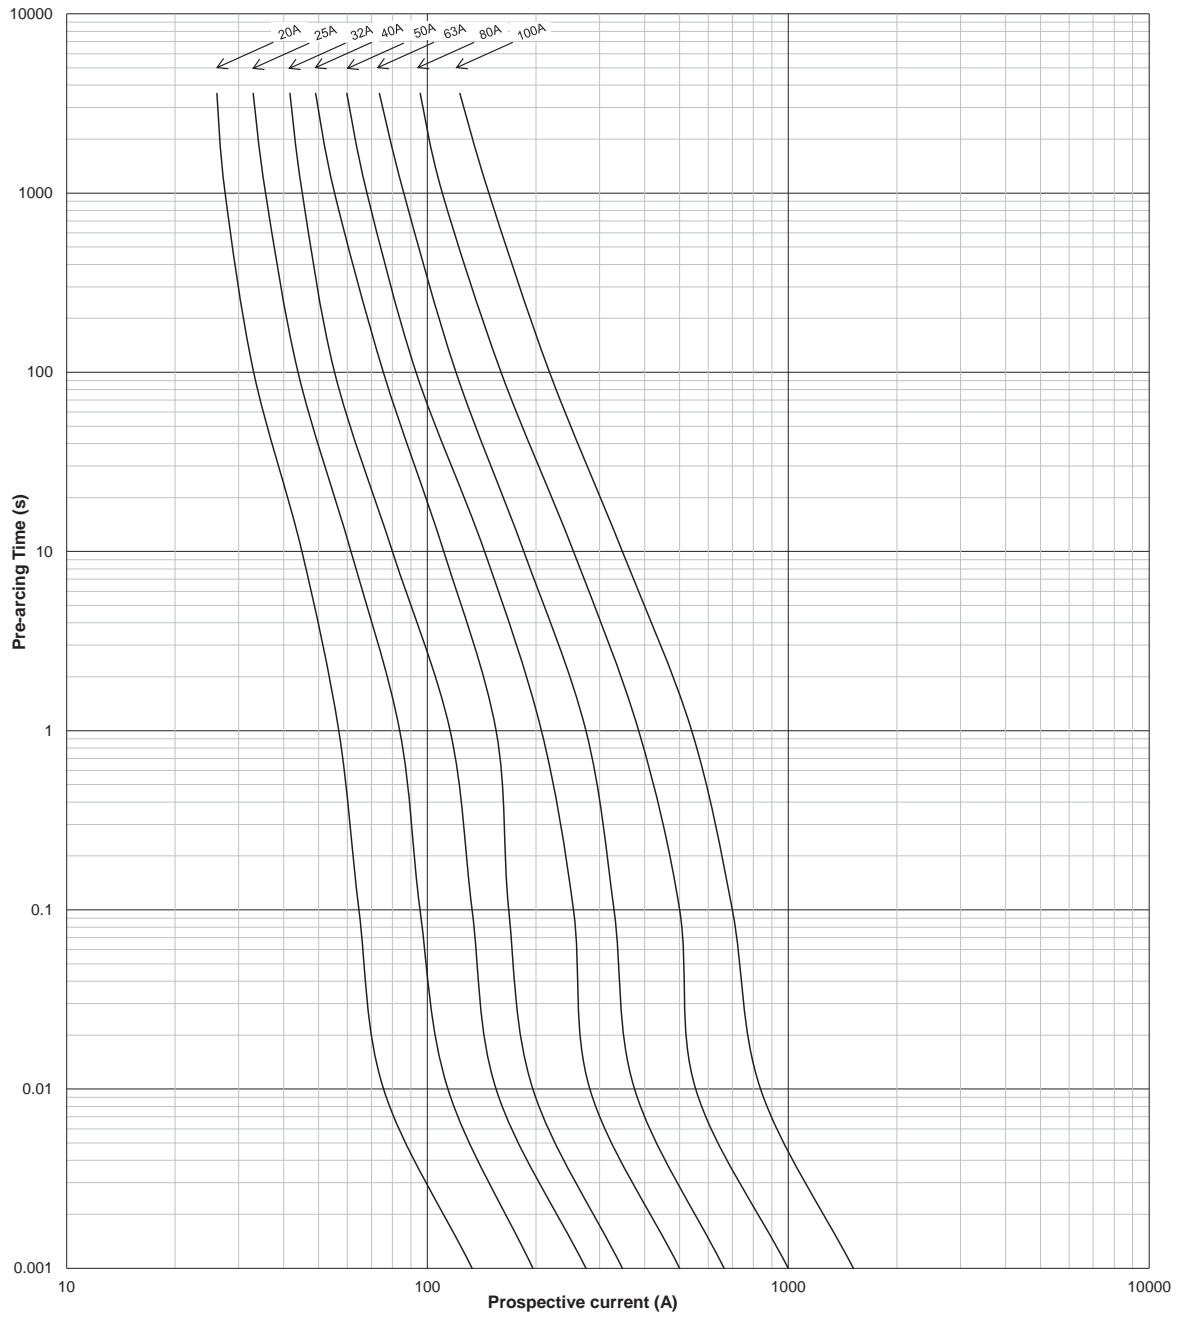


Cut-off characteristics

Peak let through current (I_{peak}) vs. Prospective Short Circuit Current in SYMM. RMS value, 50Hz / p.f. > 0.15

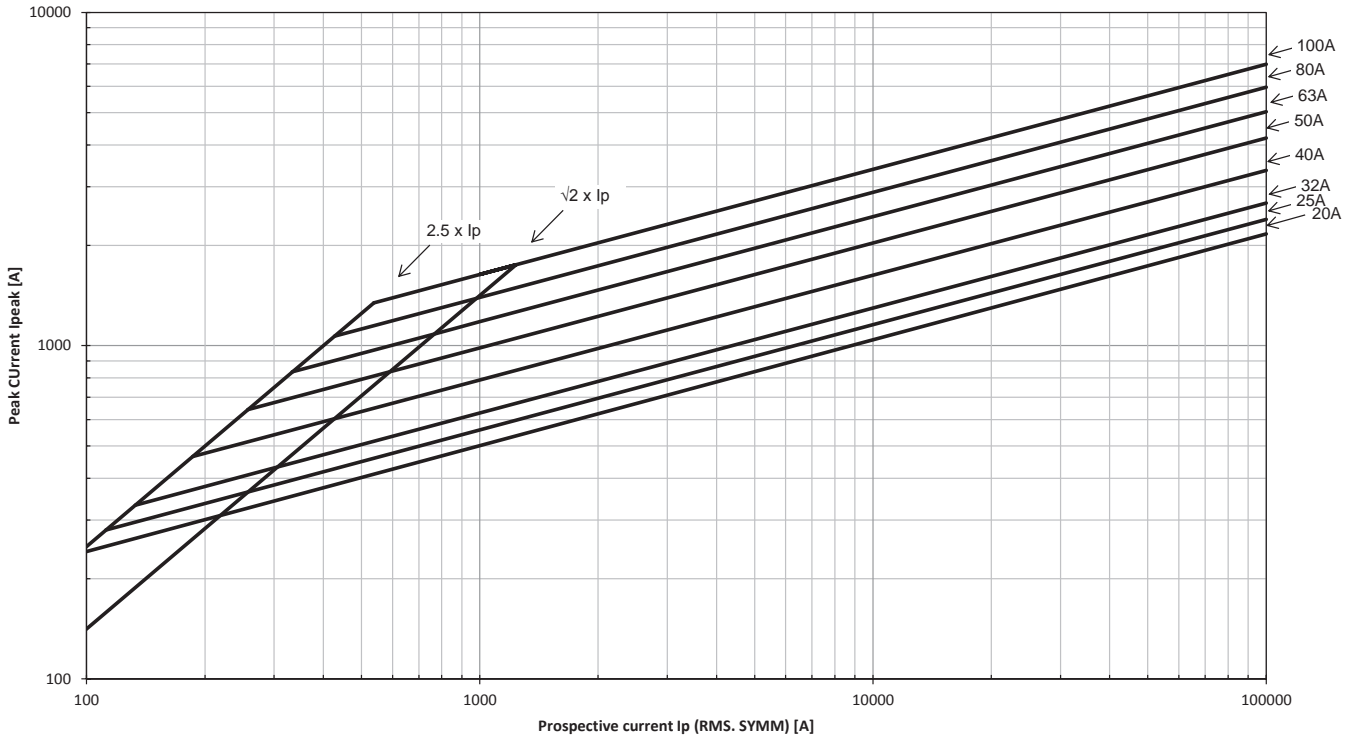

Ambient temperature derating curve Kt

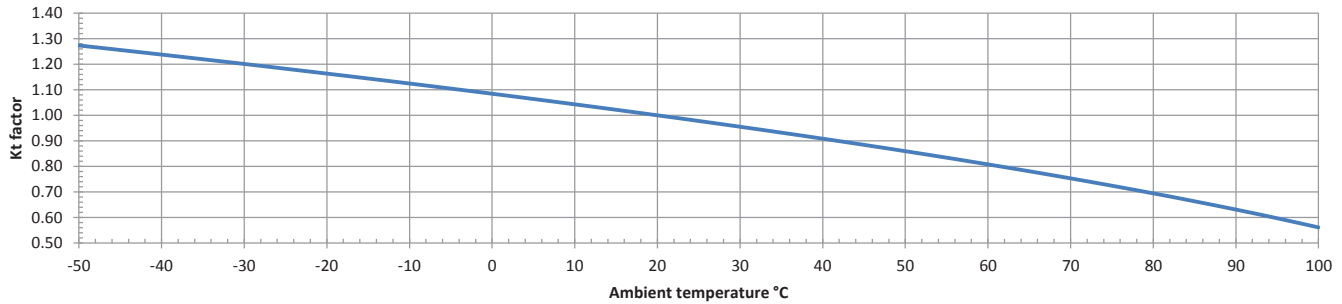

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
 EMEA Headquarters
 Route de la Longeraie 7
 1110 Morges, Switzerland

Eaton Electrical Products Limited
 Melton Road
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom

© 2017 Eaton
 All Rights Reserved
 PDF only
 Publication No. 10469
 October 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.