

## HTZ260G Series


$$I_{F(AV)} = 4.7 \text{ A}$$

$$V_{RRM} = 22400 \text{ V}$$

## High Voltage Diode Rectifier Module



### CIRCUIT DIAGRAM

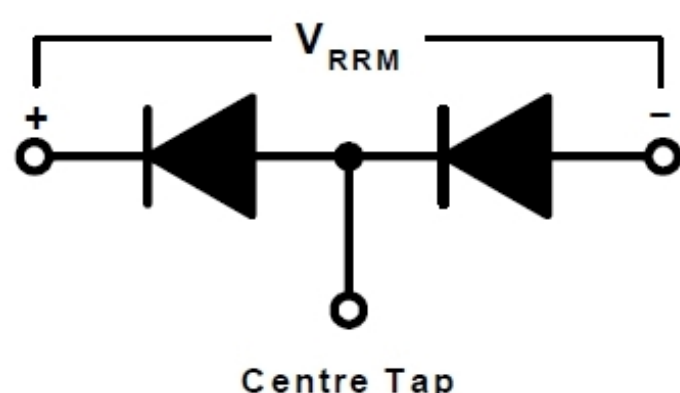

### CURRENT RATINGS - AIR COOLED

$I_{F(AV)}$	Mean forward current	Half wave resistive load $T_{amb} = 35^{\circ}\text{C}$	4.7	A
$I_F$	Continuous (direct) forward current	$T_{amb} = 35^{\circ}\text{C}$	5.8	A
$R_{th(j-a)}$	Thermal resistance junction to ambient		1.8	$^{\circ}\text{C/W}$

### CURRENT RATINGS - OIL COOLED

$I_{F(AV)}$	Mean forward current	Half wave resistive load $T_{oil} = 60^{\circ}\text{C}$	6.0	A
$I_T$	Continuous (direct) forward current	$T_{oil} = 60^{\circ}\text{C}$	7.5	A
$R_{th(j-o)}$	Thermal resistance junction to oil		0.97	$^{\circ}\text{C/W}$

### SURGE RATINGS

$I^2t$	$I^2t$ for fusing	10 ms half sine $T_{vj} = 150^{\circ}\text{C}$	200	$\text{A}^2\text{sec}$
$I_{FSM}$	Surge (non-repetitive) forward current	$T_{vj} = 150^{\circ}\text{C}$	200	A

### TEMPERATURE AND FREQUENCY RATINGS

$T_{vj}$	Virtual junction temperature	Forward (conducting)	180	$^{\circ}\text{C}$
		Reverse (blocking)	180	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature range		-40 to 100	$^{\circ}\text{C}$
f	Frequency range		20 to 400	Hz


### CHARACTERISTICS $T_{case} = 25^{\circ}\text{C}$ unless otherwise stated

$V_{FM}$	Forward voltage	At 12 Amps peak	max 16	V
$I_{RM}$	Peak reverse current	At $V_{RRM}$ ; $T_{case} = 150^{\circ}\text{C}$	max 0.5	mA

### Dimensioned Outlines

Dimensions shown are maximum in mm

Weight typ.: 1,7 Kg

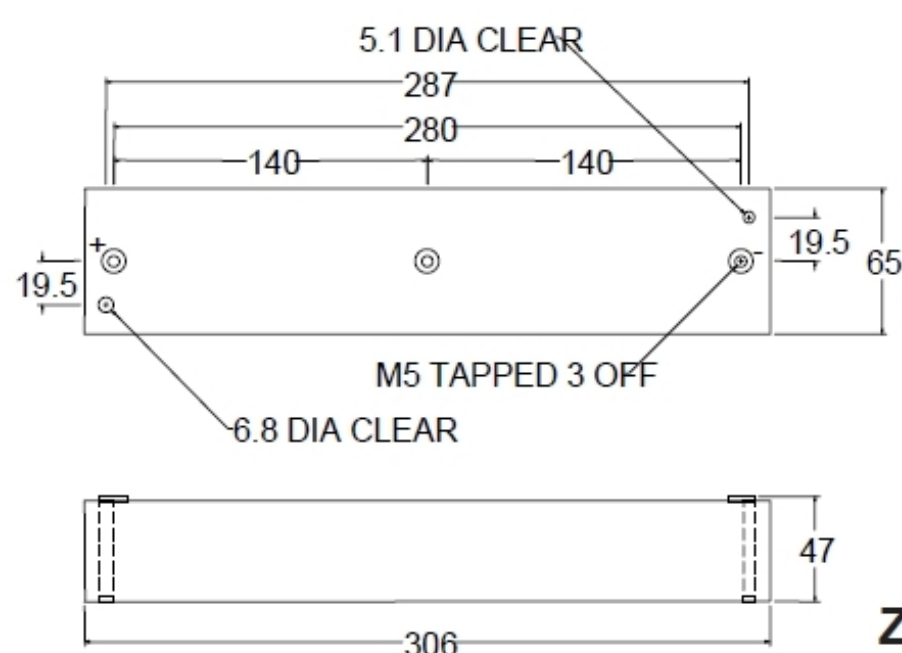

Issue 1 June 1998



# HTZ260G Series

$$I_{F(AV)} = 4.7 \text{ A}$$

$$V_{RRM} = 22400 \text{ V}$$

## High Voltage Diode Rectifier Module

