
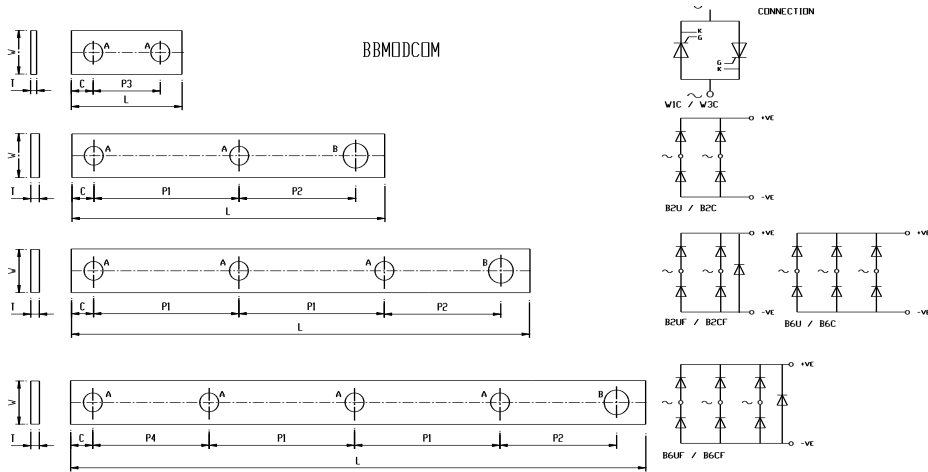






## Power Module Busbars

GD Rectifiers Ltd offer a range of module device busbars for connecting various popular circuits. Designed with optimal dimensions and pitch to assist power distribution on heatsinks.



| Module Type                                                                         | Circuit | Pt No   | Dia A | Dia B | P1  | P2 | P3 | P4  | C   | L   | W  | T  |
|-------------------------------------------------------------------------------------|---------|---------|-------|-------|-----|----|----|-----|-----|-----|----|----|
|                                                                                     |         |         | mm    | mm    | mm  | mm | mm | mm  | mm  | mm  | mm | mm |
|   | W1/W3   | 180003A | 5.5   |       |     |    | 20 |     | 6   | 32  | 12 | 2  |
|                                                                                     | B2      | 180003B | 5.5   | 6.5   | 27  | 27 | -  | -   | 7   | 68  | 12 | 3  |
|                                                                                     | B2+FWD  | 180003C | 5.5   | 6.5   | 27  | 27 | -  | -   | 7   | 95  | 12 | 3  |
|                                                                                     | B6      | 180003C | 5.5   | 6.5   | 27  | 27 | -  | -   | 7   | 95  | 12 | 3  |
|                                                                                     | B6+FWD  | 180003D | 5.5   | 6.5   | 27  | 27 | -  | 27  | 7   | 122 | 12 | 3  |
|  | W1/W3   | 180004A | 6.5   |       |     |    | 23 |     | 7.5 | 38  | 15 | 2  |
|                                                                                     | B2      | 180004B | 6.5   | 8.5   | 50  | 40 | -  | -   | 7.5 | 108 | 15 | 3  |
|                                                                                     | B2+FWD  | 180004C | 6.5   | 8.5   | 50  | 40 | -  | -   | 7.5 | 158 | 15 | 3  |
|                                                                                     | B6      | 180004C | 6.5   | 8.5   | 50  | 40 | -  | -   | 7.5 | 158 | 15 | 3  |
|                                                                                     | B6+FWD  | 180004D | 6.5   | 8.5   | 50  | 40 | -  | 40  | 7.5 | 198 | 15 | 3  |
|  | W1/W3   | 180005A | 9     |       |     |    | 35 |     | 7.5 | 50  | 19 | 5  |
|                                                                                     | B2      | 180005B | 9     | 11    | 70  | 45 | -  | -   | 10  | 137 | 25 | 5  |
|                                                                                     | B2+FWD  | 180005C | 9     | 11    | 70  | 45 | -  | -   | 10  | 207 | 25 | 5  |
|                                                                                     | B6      | 180005C | 9     | 11    | 70  | 45 | -  | -   | 10  | 207 | 25 | 5  |
|                                                                                     | B6+FWD  | 180005D | 9     | 11    | 70  | 45 | -  | 70  | 10  | 277 | 25 | 5  |
|  | W1/W3   | 180013A | 11    |       |     |    | 60 |     | 12  | 74  | 40 | 6  |
|                                                                                     | B2      | 180013B | 11    | 11    | 70  | 45 | -  | -   | 12  | 139 | 40 | 6  |
|                                                                                     | B2+FWD  | 180013C | 11    | 11    | 70  | 45 | -  | -   | 12  | 209 | 40 | 6  |
|                                                                                     | B6      | 180013C | 11    | 11    | 70  | 45 | -  | -   | 12  | 209 | 40 | 6  |
|                                                                                     | B6+FWD  | 180013D | 11    | 11    | 70  | 45 | -  | 70  | 12  | 279 | 40 | 6  |
|  | W1/W3   | 180035A | 13    | 13    |     |    | 50 |     | 15  | 90  | 50 | 10 |
|                                                                                     | B2      | 180035B | 13    | 13    | 100 | 60 | -  | -   | 15  | 190 | 50 | 10 |
|                                                                                     | B2+FWD  | 180035C | 13    | 13    | 100 | 60 | -  | -   | 15  | 290 | 50 | 10 |
|                                                                                     | B6      | 180035C | 13    | 13    | 100 | 60 | -  | -   | 15  | 290 | 50 | 10 |
|                                                                                     | B6+FWD  | 180035D | 13    | 13    | 100 | 60 | -  | 100 | 15  | 390 | 50 | 10 |

**GD Rectifiers Ltd. Bentley House, 2 William Way, Burgess Hill, West Sussex RH15 9AG.**

Tel: 01444 243452 Fax: 01444 870722 Email: [enquiries@gdrectifiers.co.uk](mailto:enquiries@gdrectifiers.co.uk)