Bussmann®

Buss High Voltage Fuses 1000 - 10,000 Volts

HV Series





CATALOG SYMBOL: HVA, HVB, HVJ, HVL, HVR, HVT, HVU, HVW, AND HVX NON-TIME DELAY 1000 TO 10,000 VOLTS

13/32" and 13/16" x Length (10.3mm and 20.6mm x Length) For High Voltage Circuits

- Non-Time Delay fuses for high voltage instruments and circuits.
- Physical size varies with electical rating of fuse to prevent over-fusing.
- Use HVA, HVB, HVJ an d HVL for circuits up to 20kw dc or 30 KVA ac. For higher interrupting capacity, use HVR, HVT, HVU, HVW and HVX.

Test Spectifications

Catalog Number	Load	Opening Time
HVA		
нув	110%	4 Hours (min.)
HVJ	135%	1 Hour (max.)
HVL 丿		
HVR		
нут	100%	4 Hours (min.)
HVU	150%	1 Hour (max.)
HVW	10070	(max.)
нух		

HVA (10	000 Volts)					
	,		Length		*Wt./10	0
Amps		Dia.	In.	mm	Lbs.	Kg
1/16	3/4					
1/8	1					
1/4	1-1/2					
1/10	2	0.41"	3"	76.1	2	0.91
2/10	3					
3/10	4					
3/8	6					
1/2	10					
-	500 Volts)					
1/2	1-1/2					
3/4	2	0.41"	4.5"	114.2	3	1.36
1	3					
	00 Volts)					
1/16	1-1/2					
1/8	2					
1/4	4	0.81"	5"	126.9	9	4.08
1/2	6					
3/4	10					
1	-					
· · ·),000 Volts)				
1/16	1					
1/8	1-1/2	0.01"	10"	050.0	15	6 00
1/4	2	0.01	10	253.8	15	6.80
1/2	3					
		(max. S.C.	KVA-500)			
1/2	3					
1	4	0.41"	3"	76.1	3	1.36
2	5					
HVT (25	500 Volts) (max. S.C.	KVA-1250))		
1/2	3					
1	5	0.41"	4.5"	114.2	4	1.81
2	-					
HVU (5	000 Volts)	(max. S.C.	KVA-250))		
1/2	3					
1	4	0.81"	5"	126.9	19	8.62
2	5					
HVW (1	200 Volts)	(max. S.C.	KVA-500	0)		
1/2	3					
1	4	0.41"	2.25"	57.1	2	0.91
2	5					
	8					
HVX (10	0,000 Volts) (max. S.C	C. KVA-12	,000)		
1/2	3	/		, -,		
1	5	0.41"	10.0"	253.8	36	16.33

Carton quantity: 10.



Bussmann®

Buss High Voltage Fuses 1000 - 10,000 Volts

HV Series



CATALOG SYMBOL: 4528, 4529, 4530, AND 2960 FUSE BLOCKS


For BUSS High Voltage Fuses

(1000 to 10,000 Volts)

· Bakelite base.

· Alloy plated terminals.

Dimensional Data

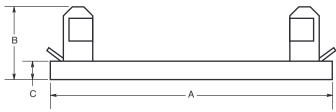


		*Dimens	*Dimensions				
For	Bock	Inches/(I	Inches/(mm's)				
Fuse	Cat.				Base		
Sym.	No.	Α	В	С	Width		
HVA	- 4528	3.75"	1.125"	0.38"	1.0"		
HVR		(95.3)	(28.6)	(9.5)	(25.4)		
нvв	4529	5.25"	1.125"	0.38"	1.0"		
нут	- 4529	(133.4)	(28.6)	(9.5)	(25.4)		
HVJ	4530	6.5"	1.66"	0.5"	1.38"		
HVU		(165.1)	(42.1)	(12.7)	(34.9)		
HVL	2960	11.44"	1.45"	0.75"	1.38"		
нух	- 2900	(290.5)	(48.4)	(19.1)	(34.9)		




Use #8 screws on blocks 4528 and 4529.

Use #10 screws on blocks 4530 and 2960.





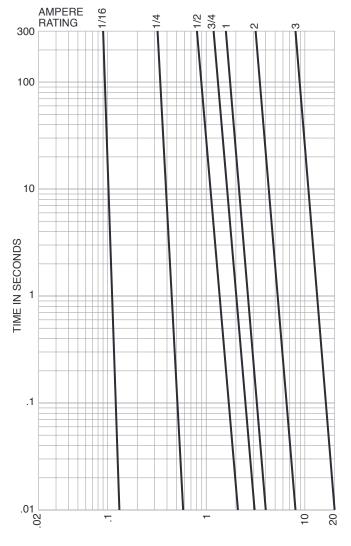

Time-Current Characteristic Curves-Average Melt

CURRENT IN AMPERES