SKKT 20, SKKT 20B



SEMIPACK[®] 1

Thyristor / Diode Modules

SKKT 20 SKKT 20B

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532


Typical Applications*


- DC motor control (e. g. for machine tools)
- · AC motor soft starters
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)
- 1) See the assembly instructions


V_{RSM}	V_{RRM}, V_{DRM}	I _{TRMS} = 40 A (maximum value for continuous operation)		
V	V	I _{TAV} = 20 A (sin. 180; T _c = 80 °C)		
900	800	SKKT 20/08E	SKKT 20B08E	
1300	1200	SKKT 20/12E	SKKT 20B12E	
1500	1400	SKKT 20/14E	SKKT 20B14E	
1700	1600	SKKT 20/16E	SKKT 20B16E	


$\begin{array}{cccccccccccccccccccccccccccccccccccc$	Symbol	Conditions	Values	Units
P3/180F; T _a = 35 °C; B2 / B6	I _{TAV}		18 (13)	Α
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	I _D		31 / 38	Α
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		P3/180F; T _a = 35 °C; B2 / B6	46 /60	Α
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	I _{RMS}	P3/180; T _a = 45 °C; W1 / W3	42 / 3 * 30	Α
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	I _{TSM}		320	Α
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			280	Α
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	i²t	T _{vj} = 25 °C; 8,3 10 ms	510	A²s
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		T _{vj} = 125 °C; 8,3 10 ms	390	A²s
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	V _T	T _{vi} = 25 °C; I _T = 75 A	max. 2,3	V
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	$V_{T(TO)}$	T _{vi} = 125 °C	max. 1	V
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	r _T `	$T_{vj} = 125 ^{\circ}\text{C}$	max. 16	mΩ
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$I_{DD}; I_{RD}$	T_{vj} = 125 °C; V_{RD} = V_{RRM} ; V_{DD} = V_{DRM}	max. 10	mA
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	t _{gd}	$T_{vj} = 25 \text{ °C; } I_G = 1 \text{ A; } di_G/dt = 1 \text{ A/}\mu\text{s}$	1	μs
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	t _{gr}	$V_{\rm D} = 0.67 * V_{\rm DRM}$	1	μs
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	(di/dt) _{cr}		max. 150	A/µs
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	(dv/dt) _{cr}		max. 1000	V/µs
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	t _a		80	μs
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		$T_{vj} = 25 ^{\circ}\text{C}$; typ. / max.	100 / 200	mA
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		T_{vj} = 25 °C; R_G = 33 Ω ; typ. / max.	250 / 400	mA
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	V _{GT}	V ₁	min. 3	V
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	I_{GT}		min. 150	mA
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	V_{GD}	$T_{vj} = 125 ^{\circ}\text{C}; \text{d.c.}$	max. 0,25	V
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	I_{GD}	$T_{vj} = 125 ^{\circ}\text{C}; \text{d.c.}$	max. 5	mA
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	R _{th(i-c)}	cont.; per thyristor / per module	1,2 / 0,6	K/W
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	R _{th(j-c)}		1,3 / 0,65	K/W
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	R _{th(j-c)}	rec. 120; per thyristor / per module	1,35 / 0,68	K/W
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	R _{th(c-s)}	per thyristor / per module		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	T_{vj}		- 40 + 125	°C
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	T _{stg}		- 40 + 125	°C
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	V _{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
a 5*9,81 m/s² m approx. 95 g Case SKKT A 46	M_s	to heatsink	5 ± 15 % ¹⁾	Nm
m approx. 95 g Case SKKT A 46	M_t	to terminal		Nm
Case SKKT A 46	а		5 * 9,81	m/s²
	m	approx.	95	g
SKKTB A 48	Case	SKKT	A 46	
		SKKTB	A 48	
<u> </u>				




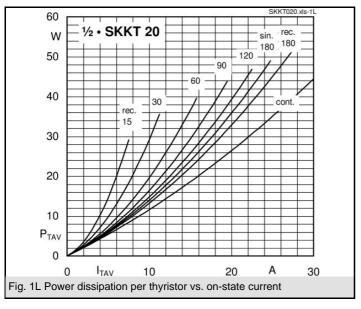


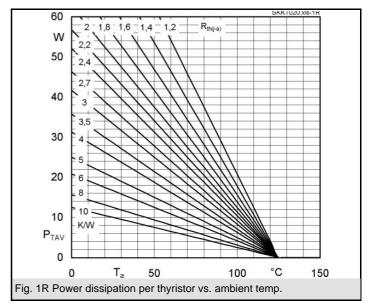

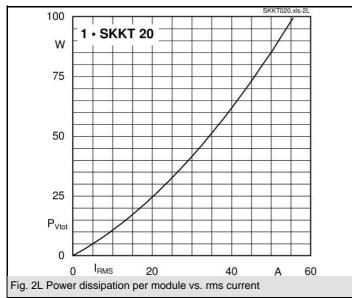


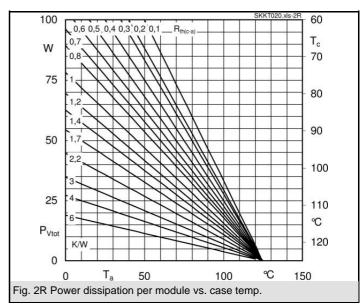


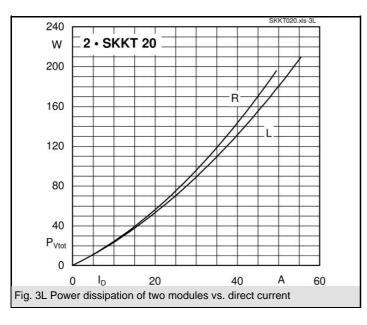


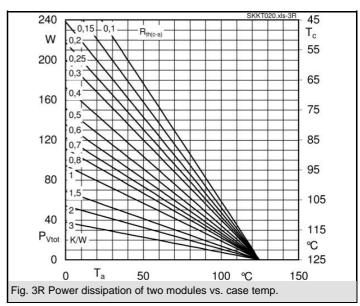



SKKT 20, SKKT 20B

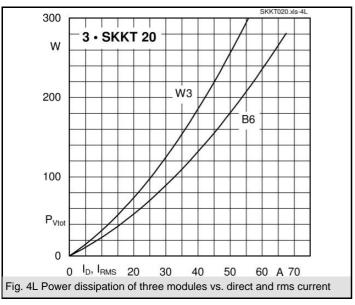


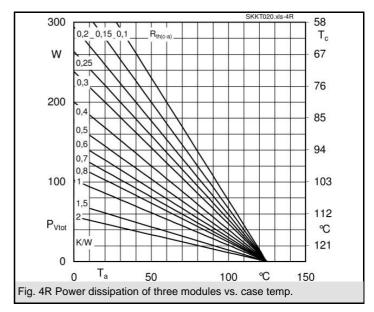


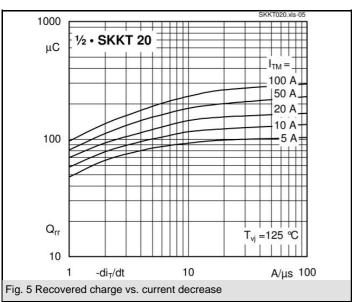


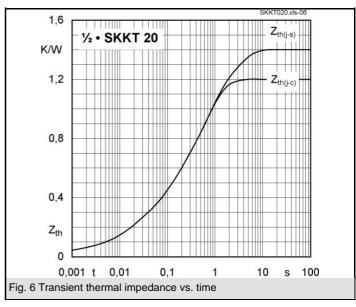


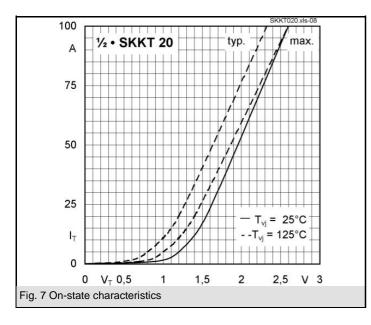

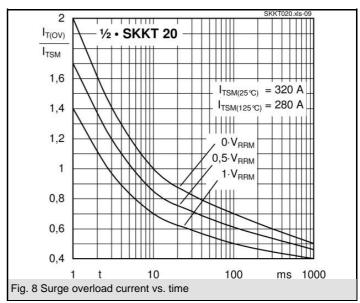

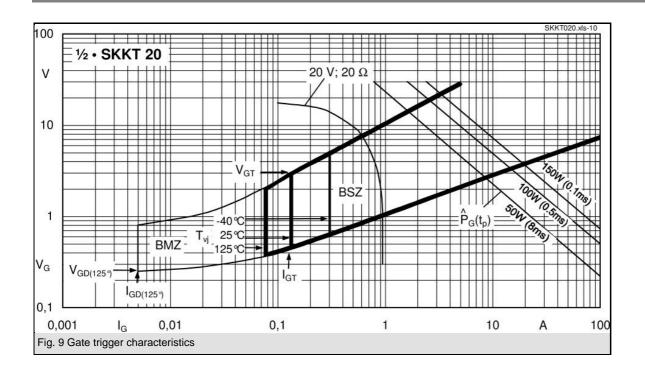

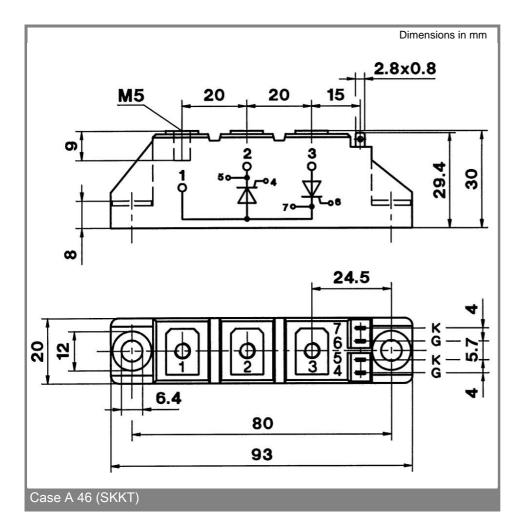



^{*} The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.