


## Fan Cooled Heatsink.

## PS384C/xxF

Suitable for Isolated Diode / Thyristor / Mosfet / IGBT Modules with 80-112mm Fixings.

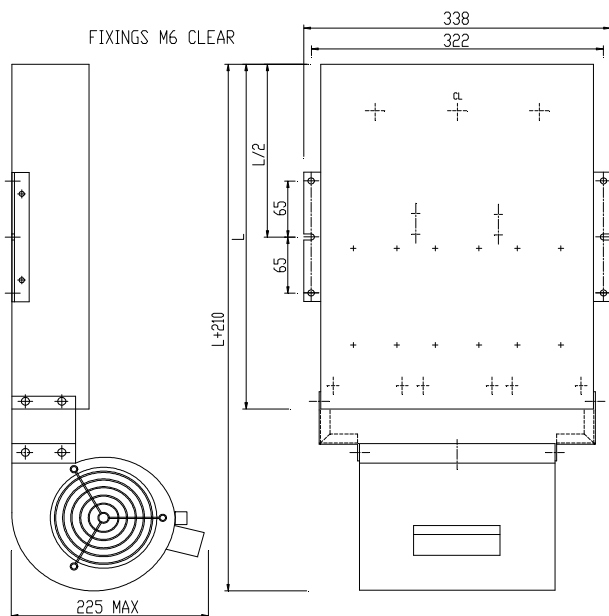

### Units include

110-115 or 230-240V AC Ball bearing fans  
Fan Finger Guard, Inlet Duct & Mtg Feet.

DES	Pt No	"L"	N*	Rth H-A	W	FAN
		mm		Deg C/W	kg	V
PS384C/400BF	040029A-11	400	3x34	0.025	16.0	110/115
3x80x38 fixing	040029A-23		6x34	0.021		230/240
			2x50	0.026		
			3x50	0.022		
PS384C/400BF	040029C-11	400	1x60	0.031	16.0	110/115
3x112x48 fixing	040029C-23		2x60	0.024		230/240
			3x60	0.020		

\* N= Number of devices and the base width mm.

W/kg not including devices.

Thermal data for guideline only.

**GD Rectifiers Ltd.** Bentley House, William Way, Burgess Hill, West Sussex RH15 9AG.

**Tel: 01444 243452 Fax: 01444 870722**

**E-Mail: [enquiries@gdrectifiers.co.uk](mailto:enquiries@gdrectifiers.co.uk) Web Site: [www.gdrectifiers.co.uk](http://www.gdrectifiers.co.uk)**